



BACK VIEW

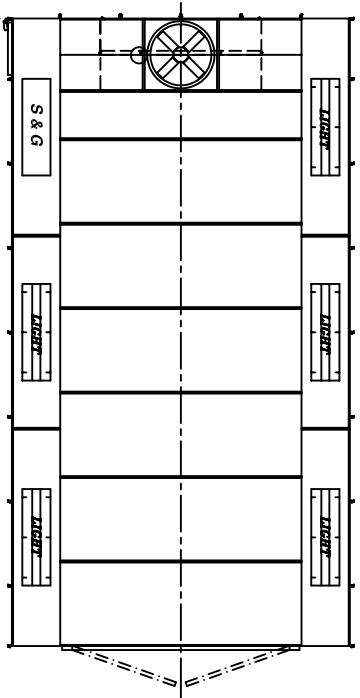

TOP VIEW

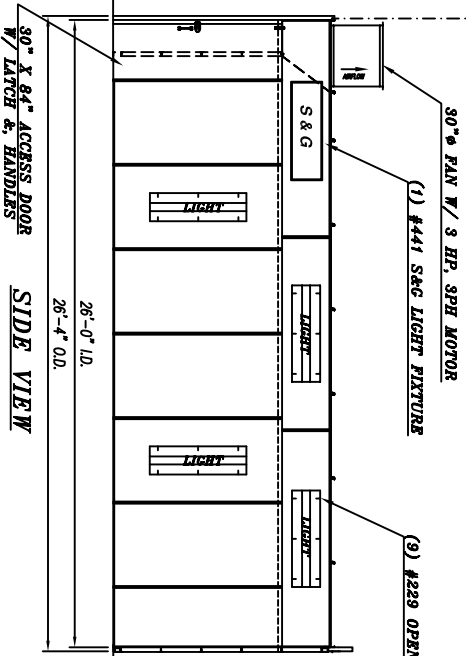


SIDE VIEW

30" FAN W/ 3 HP, 3PH MOTOR
(1) #441 S&G LIGHT FIXTURE


(3) #229 OPEN TYPE LIGHT FIXTURES

90" X 84" ACCESS DOOR
W/ LATCH & HANDLES

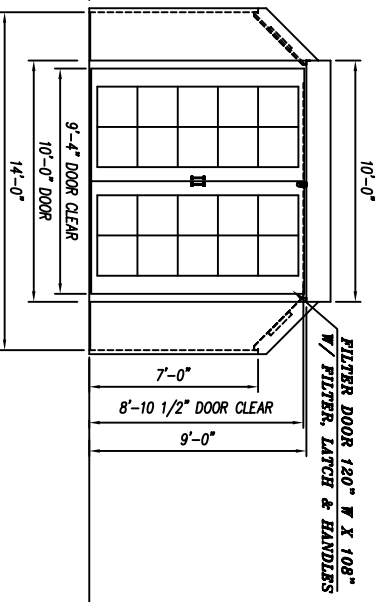

FRONT VIEW

ISOMETRIC VIEW

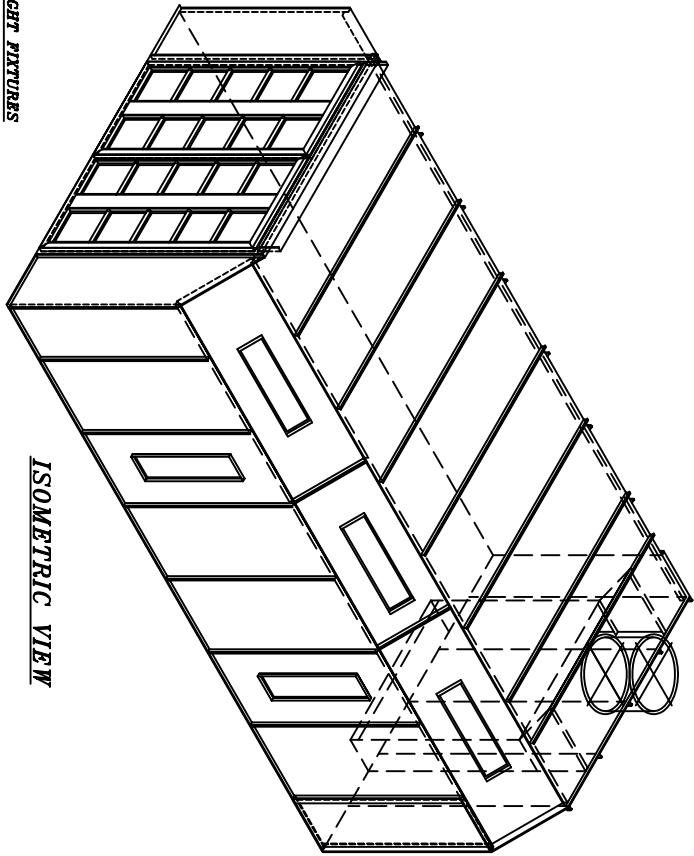

MECHANICAL NOTES:
ALL PANELS ARE 18 GA. GALVANIZED STEEL WITH PRE-PUNCHED HOLES 6" ON CENTER. BOOTH MOUNTS TO 18 GA. FLOOR RAIL TO FLOOR IS BOLTED TO BOOTH AND ANCHORED TO FLOOR. BOOTH MANUFACTURED PER THE FOLLOWING CODES: NFPA 33, OFC 45 AND NEC 516. ALL DOORS ARE EQUIPPED WITH PRESSURE ACTIVATED SAFETY LATCHES.

ELECTRICAL NOTES:
LIGHTS ARE 120 VOLT FLUORESCENT 4 TUBES. FIXTURES ARE FULLY COVERED AND GASKETED. LIGHTS ARE MOUNTED IN TEMPERED SAFETY GLASS (LIGHT BULBS ARE NOT INCLUDED).

AIR FLOW NOTES:
1-30" DIA. TUBAXIAL EXHAUST FAN WITH 3HP 3PH O.D.P. MOTOR (12600 CFM AT 1/2" S.P.)
16- 20" X 20" EXHAUST FILTER CELLS WITH WIRE RETAINER GRIDS. FILTERS ARE 2" THICK PAINT EXHAUSTS
20- 20" X 20" FAN TAKE OFF FILTERS WITH INTERNAL WIRE FRAME. FILTERS ARE MOUNTED IN ENTRY DOORS
1 EA. MANOMETER DRAFT GAUGE SUPPLIED WITH SPRAY BOOTH

		Cross Flow Spray Booth - USA	
		MODEL ECC 26 SB	File
Job Name:		26" Deep x 14' Wide x 9'H High	Date: 05-12-03
		100-1409-26-01-01	