
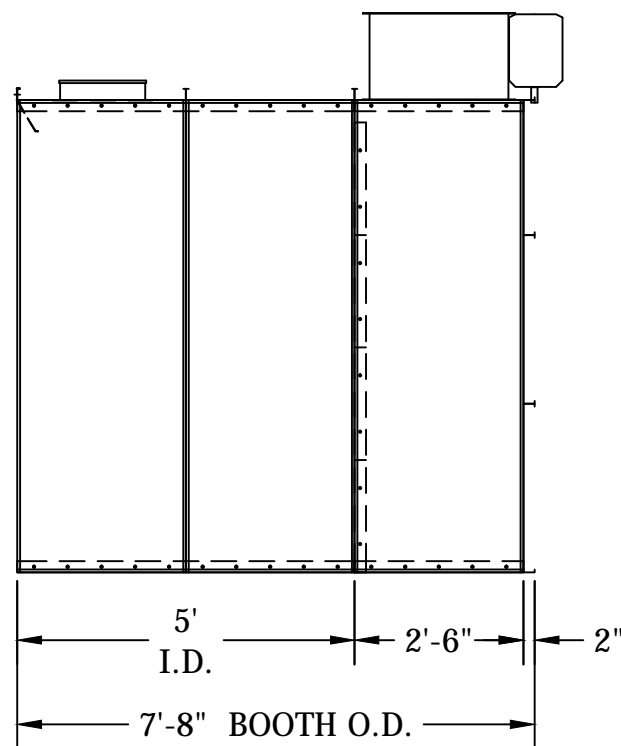


NOTES:

- 1-MANOMETER
- 12-EXHAUST FILTERS WITH GRIDS 20"X20"X2"
- 1-24" TUBEAXIAL FAN RATED FOR 4,200 SCFM EXHAUST DRIVEN BY 1 HP MOTOR ODP
- 1-S&G LIGHT FIXTURES (SEALED & GASKETED) 48" 32 WATT UL RATED MOUNTED BEHIND TEMPERED GLASS
- AIR SOLENOID VALVE

ADDITIONAL BUYOUTS REFERENCE SALES ORDER

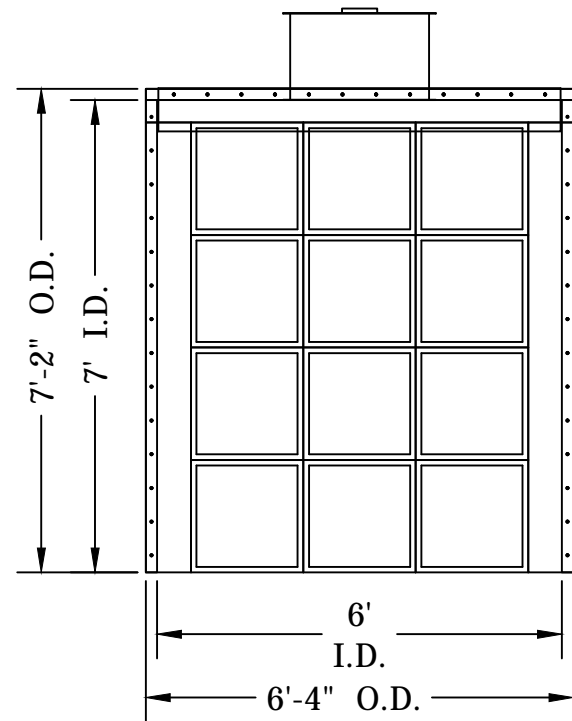

BOOTH OFB-0607-05 3-VIEW	DISTRIBUTOR FINISH PRO SPRAY BOOTHS
JOB PD	END USER
ENGINEER	
QC	
APPR.	
SHEET	SCALE
REV	
REMARKS	

